
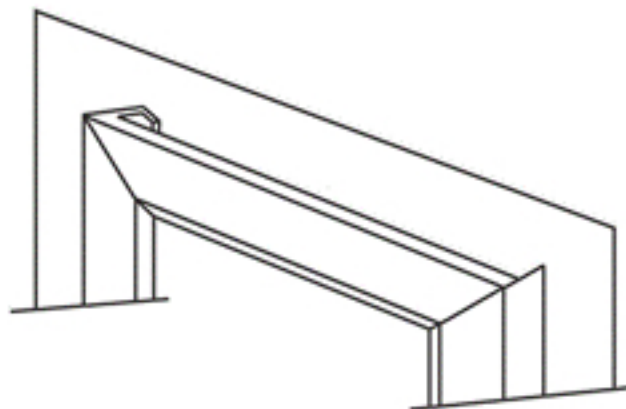


Super fast insert changes, no frame parts to remove.

Your insert slides in through hidden open slot. Hidden slot can be on top or on side of frame.

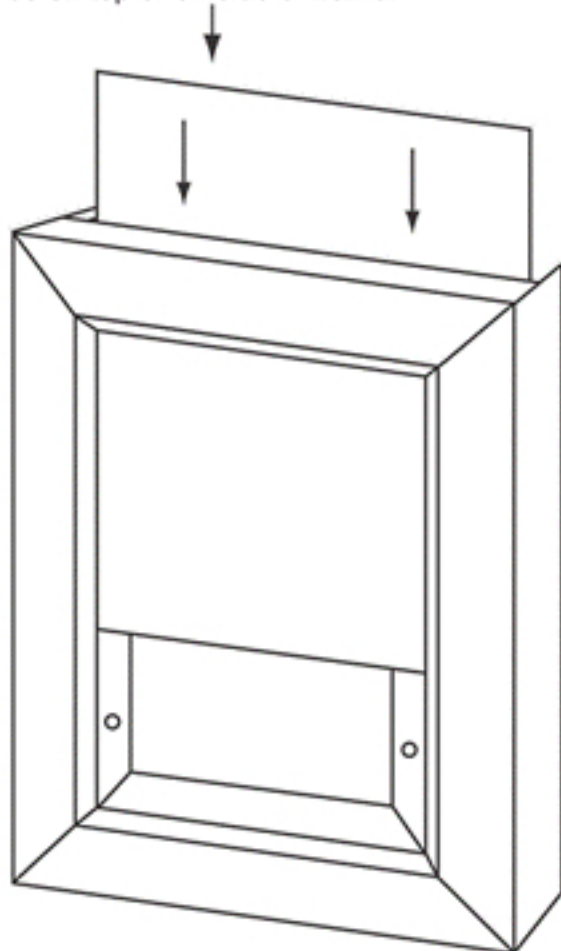

Slide-In™ frames can accept insert material up to .250" thick. Each edge of your graphic/insert is covered by 3/8" ~ .375" of frame front face edges.

Frame can be mounted to wall by screwing to wall (most secure method) or by adhering to wall with double sided tape.

Read below only if you'll be applying BLACK Slide-In™ frame to wall with double-sided tape:

If applying BLACK powder coated frame to wall with a quality high tack double-sided foam adhesive, you **MUST** clean back flanges very thoroughly with rubbing or denatured alcohol. Or also, for better adhesion, scuff up area where you will place double sided tape by roughing up with fine sandpaper, then clean with alcohol.

You must do this for the black only so that the double-sided tape won't fall off frame, for BLACK frames only.